

Project Size

6,272 sq ft

Construction

IBC Type V-b

Contract Type

BuyBoard

Facility Use

Office and meeting
space



Description

Modified six classroom
building with combination
R-panel siding and brick
veneer wainscot

Completion

45 days

Modular
Construction

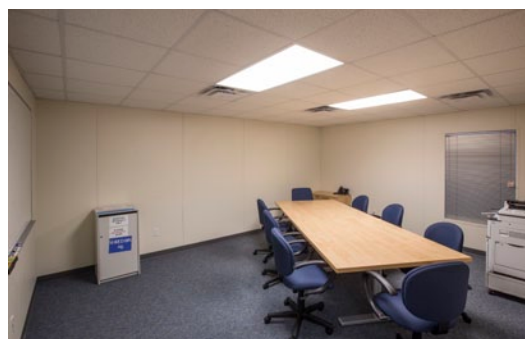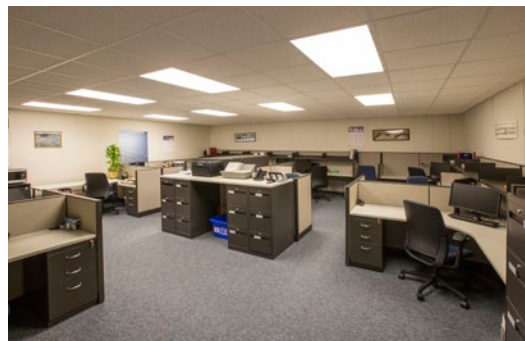

One of two buildings installed at Blinn College's Bryan campus, this standard 6,272 square foot six classroom modular building was relocated and modified by taking five of the six classrooms and adding additional walls and doors to provide pooled office space for the college's adjunct faculty. The remaining classroom was divided into four private offices and a conference and meeting room. The building exterior has a standard light stone R-panel metal siding with a thin brick veneer wainscot for the skirting, and an endwall façade designed to match the adjacent buildings. Articulated entries with ramps and canopies to match the existing campus structures were also built, along with connecting walkways to the other buildings on campus.